


## IE; Blinds FR- 45

### CLASSIFICATION



### PRODUCT FEATURES

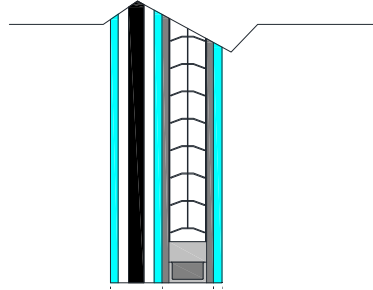

### Technical Specification

<b>Fire Rating</b>	45 min. Fire-Protection-Rated		
<b>Testing/ Standard Conformity</b>	UL 9, 10b, 10c   NFPA 80/252/257   ASTM N/A   CAN/ULC-S104, S106		
<b>Building Code Market</b>	D-H-NT-45, OH-45		
<b>Impact Safety Rating</b>	CPSC 16CFR 1201-CAT II; CAN/CGSB-12.1-M		
<b>Nominal FR Glass Thickness</b>	3/4"		
<b>Overall Nominal Unit Thickness</b>	1-5/8"	1-11/16"	1-3/4"
<b>Tolerance (in.; mm)</b>	+1/8" to -1/16"	(+3mm to -1.5 mm)	
<b>U-Value (BTU/hr*sq.ft*°F)</b>	0.44		
<b>STC Rating (dB)</b>	42		
<b>Visible Light Transmission (%)</b>	0-80		
<b>Weight (lbs./ft.<sup>2</sup>; kg/m<sup>2</sup>)</b>	11.5	(56.3)	
<b>Groove (in.: mm)</b>	Depth: 5/8" (16mm)		Width: 1-3/4" (45mm)

### Maximum Dimensions

	Window, Transom Sidelight	Door Non-Temp Rise	Door Temp Rise
<b>Maximum Exposed Height (in.; m)</b>	95 ½ (2.43)	95 ½ (2.43)	N/A
<b>Maximum Exposed Width (in.; m)</b>	95 ½ (2.43)	35 13/16 (0.91)	N/A
<b>Maximum Exposed Area (in.<sup>2</sup>; m<sup>2</sup>)</b>	3,419 (2.21)	3,419 (2.21)	N/A

MANUFACTURED BY:  
 PARILUSE, LLC.  
 14750 HWY 64  
 BEN WHEELER, TEXAS 75754  
 (903)833-1068

WWW.IEBLINDS.COM