




IE; Blinds FR- 90

CLASSIFICATION



PRODUCT FEATURES

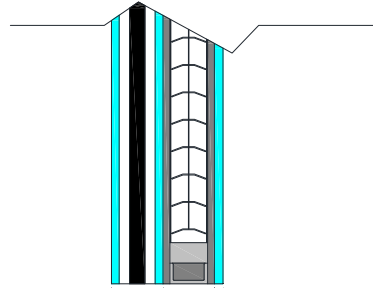

Technical Specification

Fire Rating	90 min. Fire-Protection-Rated		
Testing/ Standard Conformity	UL 10c NFPA 80/252 ASTM E119 CAN/ULC-S104		
Building Code Market	D-H-T-90, OH-90		
Impact Safety Rating	CPSC16CFR1201-CAT II; CAN/CGSB-12.1-M		
Nominal FR Glass Thickness	17/16"		
Overall Nominal Unit Thickness	1-15/16"	2"	2-1/6"
Tolerance (in.; mm)	+1/8" to -1/16" (+3mm to -1.5mm)		
U-Value (BTU/hr*sq.ft*°F)	0.33		
STC Rating (dB)	47		
Visible Light Transmission (%)	0-70		
Weight (in.: mm)	18.2	(89.0)	
Groove (in.: mm)	Depth: 5/8" (16mm)		Width: 2-7/16" (61mm)

Maximum Dimensions

	Window, Transom Sidelight	Door Non-Temp Rise	Door Temp Rise
Maximum Exposed Height (in.; m)	88-9/16 (2.25)	88-9/16 (2.25)	88-9/16 (2.27)
Maximum Exposed Width (in.; m)	88-9/16 (2.25)	35-3/4 (0.91)	35-3/4 (0.76)
Maximum Exposed Area (in.²; m²)	3,174 (2.05)	3,174 (2.05)	3,174 (1.73)

MANUFACTURED BY:
 PARILUSE, LLC.
 14750 HWY 64
 BEN WHEELER, TEXAS 75754
 (903)833-1068

WWW.IEBLINDS.COM