




IE; Blinds FR- 60

CLASSIFICATION



PRODUCT FEATURES

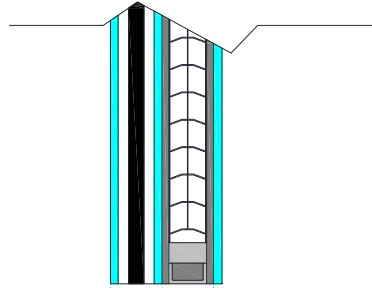

Technical Specification

Fire Rating	60 min. Fire-Protection-Rated		
Testing/ Standard Conformity	UL 10c NFPA 80/252 ASTM N/A CAN/ULC-S104		
Building Code Market	D-H-T-60, OH-60		
Impact Safety Rating	CPSC16CFR1201-CAT II; CAN/CGSB-12.1-M		
Nominal FR Glass Thickness	15/16"		
Overall Nominal Unit Thickness	1-13/16"	1-7/8"	1-15/16"
Tolerance (in.; mm)	+1/8" to -1/16" (+3mm to -1.5mm)		
U-Value (BTU/hr*sq.ft.*°F)	0.34		
STC Rating (dB)	44		
Visible Light Transmission (%)	0-80		
Weight (in.: mm)	15.4	(75.3)	
Groove (in.: mm)	Depth: 5/8" (16mm)	Width: 1-15/16"	(49mm)
SHGC Rating	XXXX		

Maximum Dimensions

	Window, Transom Sidelight	Door Non-Temp Rise	Door Temp Rise
Maximum Exposed Height (in.; m)	94-13/16 (2.41)	89-1/2 (2.27)	89-1/2 (2.27)
Maximum Exposed Width (in.; m)	94-13/16 (2.41)	30 (0.76)	30 (0.76)
Maximum Exposed Area (in.²; m²)	4,449 (2.87)	2,685 (1.73)	2,685 (1.73)

MANUFACTURED BY:
 PARILUSE, LLC.
 14750 HWY 64
 BEN WHEELER, TEXAS 75754
 (903)833-1068

WWW.IEBLINDS.COM